





EHT Electronic Hygrostat

DIN rail mount electrical / electronic hygrostat. Senses the relative humidity. The unit is set to operate in NO - Dehumidifying mode, adjustable in 5%RH increments.

Specification	
Type Number	EHT-2-220A
Article Number	55023.00
Operating Voltage	220-240VAC
Switching Differential	5 % RH
Contact type	1 NO
Max. Switching Capacity (Relay Output)	Dehumidification : 8A @ 240VAC resist. Humidification : 8A @ 240VAC resist.
Setting Range	15 ... 90% RH
Sensing element	Electronic
Connection Terminals	AWG 20-14 (0.5 -2.5mm ²) with wire protector
Operating / Storage Temperature	-20 ... 70°C
Degree of protection	IP20
Dimensions (L/W/H)	61/65/45mm
Weight	approx 70g

Features:

- Easy installation on a EN 50022 compliant standard rail (35mm profiled rail)
- Space saving due to the compact size of its design
- High breaking capacity
- CE marking

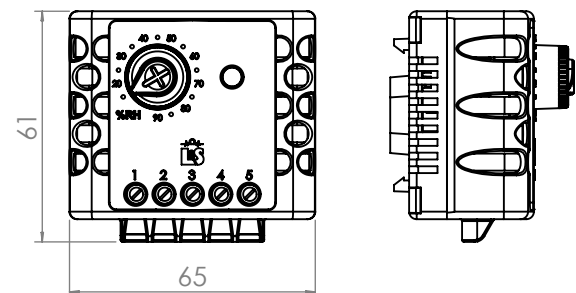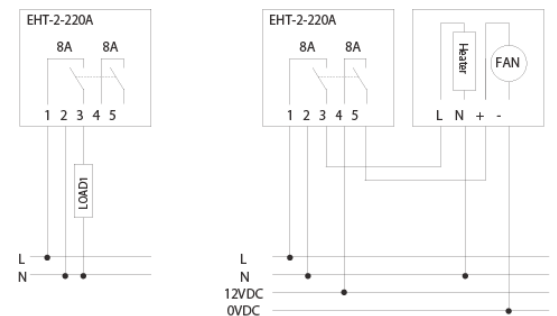

Lund & Sorensen

Beijing
China

Tel. +86 10 6433 3092 info@ls-windpower.com
Fax +86 10 8453 7382 www.ls-windpower.com

