




WINDPOWER

Type HSD Drum Heaters

QUALITY ASSURED
DEDICATED DESIGN
COST EFFECTIVE
EXPRESS DELIVERY

- Teflon/Polyester Jacket
- 0 to 40°C or 0 to 90°C Thermostat
- Thermal Insulation
- Adjustable Quick Release Buckles
- Standard Sizes 25L, 50L, 105L, 200L
- Bespoke Sizes to Order
- 3 Metre Power Cable
- Double Insulation IP40
- Ex-stock

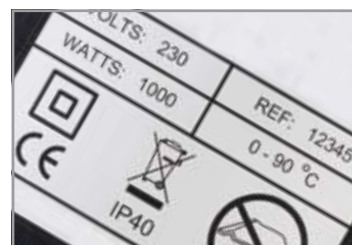

UL approved manufacturing facilities

L&S WPD 16/06.08.GB



Lund & Sorensen A/S

Maserativej 4 | Tel. +45 75 85 78 22 | info@ls-windpower.com
DK-7100 Vejle | Fax +45 75 85 75 35 | www.ls-windpower.com



Type HISD Drum Heaters

ADVANTAGES

A simple and an effective heating solution for all types of drums. Particularly plastic containers as the jacket provides a gentle and efficient heating system. These jackets are ideally suited for the warming of a variety of products including fats, oils and foodstuffs.

Used throughout the world by a multitude of industries from pharmaceutical to chemical, cosmetic to food, the HISD heater is the ideal solution for heating liquid materials stored in metal or plastic drums.

CONSTRUCTION

Manufactured from lightweight but resilient materials and fitted with adjustable quick release buckles for ease of installation and removal. Temperature regulated via an in-built thermostat up to a maximum of 90°C for plastic drums. Jackets with higher power ratings and 0-120°C thermostat can be manufactured for use with metal drums.

TECHNICAL DATA

Rating: 110 or 230 Volts
Temp. Control: 0 to 40°C
or 0 to 90°C

400mm x 1020mm	200 Watts	25 L
460mm x 1250mm	250 Watts	50 L
370mm x 1650mm	400 Watts	105 L
450mm x 1950mm	450 Watts	200 L



THERMAL INSULATION JACKET

Manufactured from the same materials as the drum heaters, Lund & Sorensen can supply insulation jackets to cover all sizes of drums and containers to help reduce heat losses of pre-heated products.

CUSTOM MADE

A wide range of sizes can be manufactured to customers requirements. Higher power ratings are also available for metal drums. Please contact our technical sales team for advice and information.

HEALTH AND SAFETY

All HISD side drum heaters are manufactured to conform to the EEC low voltage and EMC directives and CE marked accordingly. It is advised that power to the drum heater be disconnected when the drum is either empty Or being filled, or upon installation or removal of the heater itself. It is recommended that the unit be operated in a dry environment with the drum vented to avoid build up of internal pressure.

