




WINDPOWER

Series B

Special Features

- Thermal separation of the PTC heater from the external profile (patented)
- Limited external profile temperature
- Optimal convection

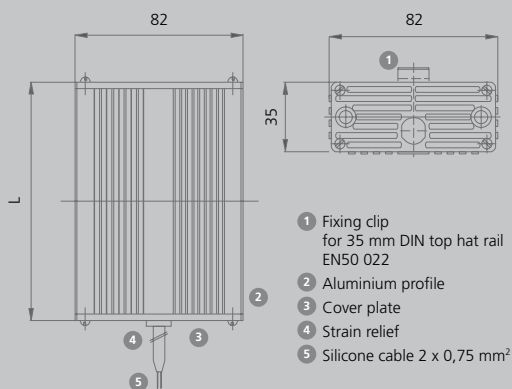

Data is given for illustration purposes only and does not release the customer from independent application tests.



CREATIVE ELECTRIC HEATING

Series B		90		120		150		200	
Rasted power at 10°C	(W)	30	50	40	60	50	75	80	100
External profile temp. (approx.)	(°C)	70	90	80	90	80	100	80	100
Voltage range		110 - 240 V, AC/DC							
Protection class		-							
System of protection		IP20							
Connection cable 2 x 0,75 mm ² , silicone		500 mm long							
Fixing		DIN Clip for 35 mm rail EN50 022							
Approvals		VDE, UL, CSA, CE (in preparation)							
Dimensions	LxWxH (mm)	90x82x35		120x82x35		150x82x35		200x82x35	
Weight	(kg)	0,29		0,38		0,48		0,64	
Recommended fuse (time-delay)	240 V	4A	6,3A	4A	6,3A	4A	6,3A	6,3A	6,3A
	110V	2A	4A	2A	4A	2A	4A	4A	6,3A



Lund & Sorensen A/S

Maserativej 4 | Tel. +45 75 85 78 22 | info@ls-windpower.com
DK-7100 Vejle | Fax +45 75 85 75 35 | www.ls-windpower.com

