




WINDPOWER

Series E

Special Features

- Optimum convection
- High power density

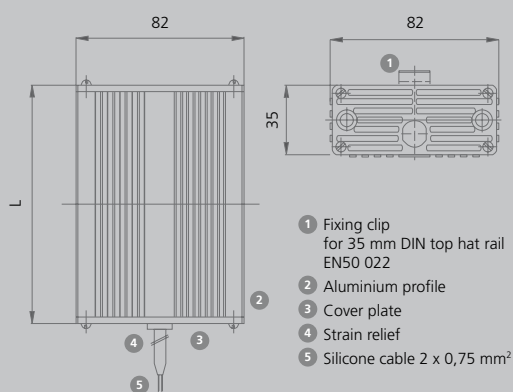

Data is given for illustration purposes only and does not release the customer from independent application tests.



CREATIVE ELECTRIC HEATING

Series E		90	120	150	200
Rasted power at 10°C	(W)	80	100	120	150
External profile temp. (approx.)	(°C)	120	130	130	130
Voltage range		110 - 240 V, AC/DC			
Protection class		-			
System of protection		IP20			
Connection cable 2 x 0,75 mm², silicone		500 mm long			
Fixing		DIN Clip for 35 mm rail EN50 022			
Approvals		VDE, UL, CSA, CE (in preparation)			
Dimensions	LxWxH (mm)	90x82x35	120x82x35	150x82x35	200x82x35
Weight	(kg)	0,3	0,4	0,49	0,65
Recommended fuse (time-delay)	240 V	6,3A	6,3A	6,3A	6,3A
	110V	4A	4A	4A	6,3A



Lund & Sorensen A/S

Maserativej 4 | Tel. +45 75 85 78 22 | info@ls-windpower.com
DK-7100 Vejle | Fax +45 75 85 75 35 | www.ls-windpower.com

