




WINDPOWER

Series D

Special Features

- Rugged aluminium extrusion profile
- Compact design with high power density
- Self-regulating PTC-Technology
- Safety by temperature limitation

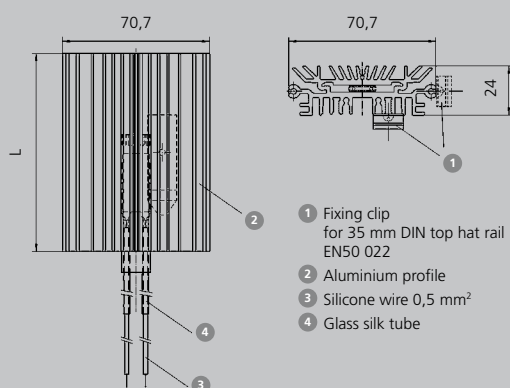

Data is given for illustration purposes only and does not release the customer from independent application tests.



CREATIVE ELECTRIC HEATING

Series D		65		95		125		175	
Rasted power at 10°C	(W)	30	50	40	60	50	75	80	100
External profile temp. (approx.)	(°C)	130	205	135	205	160	190	190	200
Voltage range		110 - 240 V, AC/DC							
Protection class		-							
System of protection		IP20							
Connection cable 2 x 0,75 mm², silicone		500 mm long							
Fixing		DIN Clip for 35 mm rail EN50 022							
Approvals		VDE, UL, CSA, CE (in preparation)							
Dimensions	LxWxH (mm)	65x70,7x24		95x70,7x24		125x70,7x24		175x70,7x24	
Weight	(kg)	0,13	0,14	0,18	0,19	0,23	0,24	0,33	0,34
Recommended fuse (time-delay)	240 V	4A	6,3A	4A	6,3A	4A	6,3A	6,3A	6,3A
	110V	2A	4A	2A	4A	2A	4A	4A	6,3A

Optional

Connection cable 2 x 0,75 mm², Silicone

Lund & Sorensen A/S

Maserativej 4 | Tel. +45 75 85 78 22 | info@ls-windpower.com
DK-7100 Vejle | Fax +45 75 85 75 35 | www.ls-windpower.com

