



WINDPOWER


Series P

Special Features

- Flat design
- Large contact surface
- The max. achievable power results from a direct screw fixing to an assembly plate
- The touch protection must be mounted to the heater with a spacer of min. 5 mm to reduce the temperature
- Optional with touch protection



CREATIVE ELECTRIC HEATING

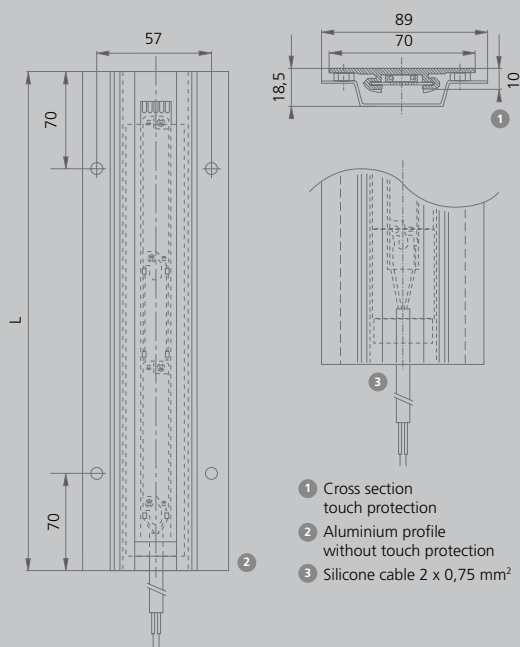

Data is given for illustration purposes only and does not release the customer from independent application tests.

Series P		250	340	400
Rasted power at 10°C (free in air)	(W)	70	95	110
Profile temperature (approx.)	(°C)	200	200	200
Max. achievable power with good thermal contact	(W)	250	280	300
Voltage range		110 - 240 V, AC/DC		
Protection class		-		
System of protection		IP20		
Connection cable 2 x 0,75 mm², silicone		500 mm long		
Fixing		Fitting holes		
Approvals		VDE, UL, CE		
Dimensions	LxWxH (mm)	250x70x18	340x70x18	400x70x18
Weight	(kg)	0,2	0,31	0,38
Recommended fuse (time-delay)	240 V	10A	10A	10A
	110V	6,3A	6,3A	6,3A



Lund & Sorensen A/S

Maserativej 4 | Tel. +45 75 85 78 22 | info@ls-windpower.com
DK-7100 Vejle | Fax +45 75 85 75 35 | www.ls-windpower.com

