




WINDPOWER

Series 25 F

Features

- High power to size ratio
- Lightweight
- Easy to fit
- Pre-wired
- Independent fan circuit to aid climate cooling

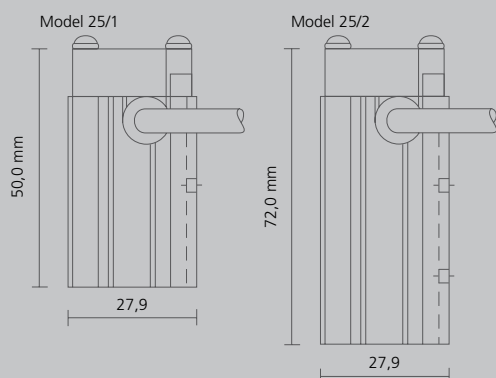

CREATIVE ELECTRIC HEATING

ORDERING EXAMPLE

Type	Size	Power	Fan Input	AC/DC	Heater	Finger guard	DIN clip
	1 / 2		12 / 24		Voltage	1 / 0	1/0
C25	2	30 W	12 V	DC	24 V	0	1

Ordering Code Example: C25 / 2 - 30 W - 12 V - DC - 24 V - 0 - 1

Series 25 F		25/1				25/2		
Norminal Power Output	at 10°C, 12 V or 230 V*	5 W	10 W	20 W	10 W	20 W	30 W	40 W
Rasted fan current (amps)	at 12 V	0.06	0.06	0.06	0.06	0.06	0.06	0.06
Recommended fuse	at 12 V / 24 V	4	4	4	4	4	4	4
(time delay, amps)	at 115 V / 230 V	n/a	n/a	n/a	n/a	2	2	2
Fan volumetict flow at zero static pressure	(m ³ /hr)	5.1	5.1	5.1	5.1	5.1	5.1	5.1
Fan lifetime	at 40°C, L 10 hours	120.000	120.000	120.000	120.000	120.000	120.000	120.000
Input Voltage (V)	fan DC	12 / 24	12 / 24	12 / 24	12 / 24	12 / 24	12 / 24	12 / 24
	heater	12 / 24	12 / 24	12 / 24	12 / 24	12 / 24	12 / 24	12 / 24
						100 / 240	100 / 240	100 / 240
Dimensions (mm)	cross section	26 x 27	26 x 27	26 x 27	26 x 27	26 x 27	26 x 27	26 x 27
	length of profile and fan	50	50	50	72	72	72	72
Weight (kg)		0.06	0.06	0.06	0.09	0.09	0.09	0.09
Protection Type		IP 20	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Cable length (mm)		600	600	600	600	600	600	600
Outlet Finger Guard	(High Voltage supply)	n/a	n/a	n/a	n/a	Y	Y	Y
Outlet Finger Guard	(Low Voltage supply)	Option	Option	Option	Option	Option	Option	Option



* Other power outputs available on request. Data is given for illustration purposes only and does not release the customer from independent applications tests.

Lund & Sorensen A/S

Maserativej 4 | Tel. +45 75 85 78 22 | info@ls-windpower.com
DK-7100 Vejle | Fax +45 75 85 75 35 | www.ls-windpower.com

