




WINDPOWER

Series 40 F

Features

- High power to size ratio
- Lightweight
- Easy to fit
- Pre-wired
- Independent fan circuit to aid climate cooling

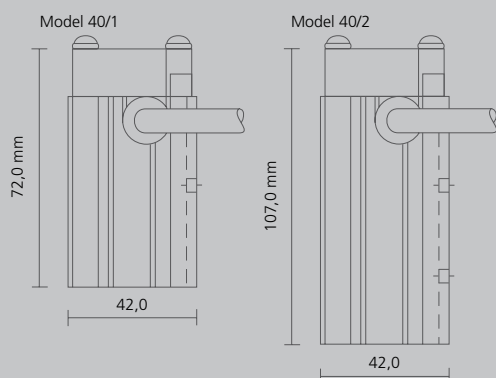

CREATIVE ELECTRIC HEATING

ORDERING EXAMPLE

Type	Size	Power	Fan Input	AC/DC	Heater Voltage	Finger guard outlet	DIN clip outlet	Filter
	1 / 2		12 / 24			1 / 0	1 / 0	1/0
C40	2	125 W	24 V	AC	240 V	1	0	1

Ordering Code Example: C40 / 2 - 125 W - 24 V - AC - 240 V - 1 - 0 - 1 - 1

Series 40 F		40/1				40/2			
Norminal Power Output	at 10°C, 12 V or 230 V*	45 W	60 W	80 W	100 W	125 W	150 W	200 W	230 W
Rasted fan current (amps)	at 12 V	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.165
Recommended fuse	at 12 V / 24 V	6	6	n/a	n/a	n/a	n/a	n/a	n/a
(time delay, amps)	at 115 V / 230 V	2	2	2	4	4	4	4	4
Fan volumetict flow at zero static pressure	(m³/hr)	12.4	12.4	12.4	12.4	12.4	12.4	12.4	17
Fan lifetime	at 40°C, L 10 hours	120.000	120.000	120.000	120.000	120.000	120.000	120.000	-
Input Voltage (V)	fan DC	12 / 24	12 / 24	12 / 24	12 / 24	12 / 24	12 / 24	12 / 24	12/24
	heater	12 / 24	12 / 24						
		100 / 240	100 / 240	100 / 240	100 / 240	100 / 240	100 / 240	100 / 240	100 / 240
Dimensions (mm)	cross section	42 x 42	42 x 42	42 x 42	42 x 42	42 x 42	42 x 42	42 x 42	42 x 42
	length of profile and fan	72	72	72	72	107	107	107	107
Weight (kg)		0.175	0.175	0.175	0.175	0.260	0.260	0.260	0.275
Protection Type		IP 20	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20	IP20
Cable length (mm)		600	600	600	600	600	600	600	600
Outlet Finger Guard	(High Voltage supply)	Y	Y	Y	Y	Y	Y	Y	Y
Outlet Finger Guard	(Low Voltage supply)	Option	Option	Option	Option	Option	Option	Option	Option



* Typical power reduction of 25% when filter fixed.

** Other power outputs available on request. Data is given for illustration purposes only and does not release the customer from independent applications tests.

Lund & Sorensen A/S

Maserativej 4 | Tel. +45 75 85 78 22 | info@ls-windpower.com
DK-7100 Vejle | Fax +45 75 85 75 35 | www.ls-windpower.com

